


LENS GASKETS AVAILABLE FROM STOCK
PERSONALISED MARKING AND PACKING – SHORT DELIVERY TIME!

Dimensional standards:

- SAIPEM / SNAMPROGETTI TB.HPU.5002 - TB.5002
- UREA CASALE 8577-00-SDP-012 – 000-00-SDP-012

Material grades:

- ASTM A182 – F 316L UREA GRADE MODIFIED
- ASTM A182 – F310 MoLN / 25.22.2 / UNS S31050

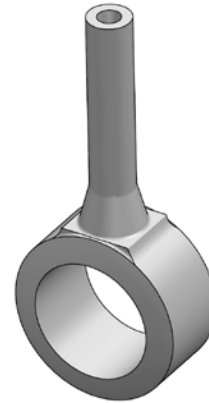

NPS gasket	NPS branch	INTERNAL DIAMETER	EXTERNAL DIAMETER	CENTER TO END	THICKNESS	MASS KG
1/4"	1/4"	6,0	15	90	31,0	0,11
1/2"	1/4"	11,3	21	100	31,0	1,15
	1/2"				37,5	0,26
3/4"	1/4"	14,7	27	100	31,0	0,19
	1/2"				37,5	0,31
	3/4"			105	44,0	0,42
1"	1/4"	19,2	32	100	31,0	0,22
	1/2"				38,0	0,36
	3/4"			110	44,0	0,50
	1"			115	50,0	0,67
1.1/2"	1/4"	30,5	48	115	33,0	0,37
	1/2"			115	40,0	0,55
	3/4"			120	45,5	0,71
	1"			130	52,0	1,00
2"	1/4"	39,3	56	125	33,0	0,41
	1/2"				40,0	0,60
	3/4"			130	46,0	0,80
	1"			140	53,0	1,05
3"	1/4"	58,4	83	150	36,0	0,83
	1/2"				43,0	1,10
	3/4"			155	49,0	1,38
	1"			165	55,5	1,75
4"	1/4"	77,2	108	175	39,0	1,37
	1/2"				46,0	1,75
	3/4"			180	53,0	2,15
	1"			190	59,0	2,60

The reference for urea grade forged fittings

NPS gasket	NPS branch	INTERNAL DIAMETER	EXTERNAL DIAMETER	CENTER TO END	THICKNESS	MASS KG
6"	1/4"	116,4	160	215	43,0	3,00
	1/2"				50,0	3,25
	3/4"			220	56,0	4,25
	1"			230	62,0	4,95
8"	1/4"	153,1	212	255	51,0	6,10
	1/2"				58,0	7,16
	3/4"			260	64,0	8,20
	1"			270	70,0	9,30
10"	1/4"	190,0	265	290	55,0	10,00
	1/2"				62,6	11,90
	3/4"			295	68,0	13,20
	1"			305	74,7	14,90

Please contact our commercial department to check quantities available!

meccanica@meccanicapadana.com

