


DISTANZIATORI SEZIONATORI DI LINEA

RING SPACERS AND SINGLE BLINDS R.F.

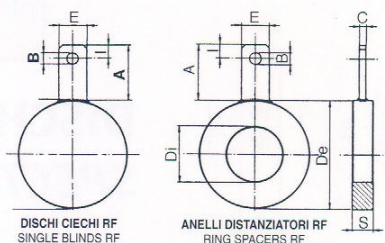

S.150 Lbs

Dimensions ANSI B 31.3 - B 16.5 - B 16.20

DNP	De	Di	I	S	A	B	C	E	s	Kg.	B
	1/2"	44,5	21,3	12	4	100	12	3	25	0,10	0,15
	3/4"	54	26,7	12	4	100	12	3	25	0,10	0,15
1"		63,5	33,4	12	6	100	12	4	25	0,15	0,20
1"	1/2"	82,5	48,3	12	6	100	12	4	25	0,20	0,30
2"		101,5	60,3	12	6	100	12	4	25	0,35	0,50
3"		133,5	88,9	17	6	135	17	6	35	0,65	0,95
4"		171,5	114,3	17	8	135	17	6	35	1,05	1,70
6"		219	168,3	17	12	135	17	8	35	1,60	3,55
8"		274,5	219,5	17	14	135	17	10	35	2,80	7,10
10"		336	273,0	17	18	135	17	15	35	4,70	12,80
12"		406,5	323,8	17	20	135	17	15	35	7,70	20,00
14"		447,5	355,6	20	22	160	20	20	40	11,00	28,00
16"		511	406,4	20	26	160	20	20	40	16,20	42,00
18"		546	457,2	20	28	160	20	20	40	17,00	53,50
20"		603	508,0	20	30	160	20	25	40	21,00	68,50
22"		657,5	558,8	25	40	200	25	25	50	31,50	108,50
24"		714,5	609,6	25	46	200	25	25	50	33,50	117,00

S.900 Lbs

Dimensions ANSI B 31.3 - B 16.5 - B 16.20

DNP	De	Di	I	S	A	B	C	E	S	Kg.	B
1/2"	-	-	-	-	-	-	-	-	-	-	-
3/4"	-	-	-	-	-	-	-	-	-	-	-
1"	-	-	-	-	-	-	-	-	-	-	-
1"	1/2"	-	-	-	-	-	-	-	-	-	-
2"	-	-	-	-	-	-	-	-	-	-	-
3"	165	88.9	17	18	150	17	10	35	2.50	3.40	-
4"	203	114.3	17	20	150	17	10	35	4.00	5.60	-
6"	285.5	168.3	17	30	150	17	15	35	10.50	15.70	-
8"	355.0	219.1	17	36	160	17	20	35	18.50	29.50	-
10"	432	273.0	17	44	160	17	25	35	32.00	52.50	-
12"	495.5	323.8	17	52	160	17	25	35	46.50	80.50	-
14"	517.5	355.6	20	58	180	20	25	40	51.50	96.00	-
16"	571.5	406.4	20	66	180	20	30	40	66.50	132.50	-
18"	635	457.2	20	76	200	20	30	40	93.00	191.00	-
20"	695.5	508.0	20	82	200	20	30	40	117.00	248.00	-
22"	-	-	-	-	-	-	-	-	-	-	-
24"	835	609.6	25	98	250	25	35	50	201.00	426.50	-

S.300 Lbs

Dimensions ANSI B 31.3 - B 16.5 - B 16.20

DNP	De	Di	I	S	A	B	C	E	s	kg.	B
	1/2"	61,5	21,3	12	4	100	12	3	25	0,10	0,15
	3/4"	63,5	26,7	12	4	100	12	3	25	0,15	0,20
1"		70	33,4	12	6	100	12	4	25	0,20	0,25
1"	1/2"	92	48,3	12	6	100	12	4	25	0,25	0,35
2"		108	60,3	12	6	100	12	4	25	0,40	0,55
3"		146	88,9	17	10	135	17	6	35	1,00	1,45
4"		178	114,3	17	12	135	17	6	35	1,70	2,70
6"		247,5	168,3	17	18	135	17	8	35	3,90	6,90
8"		305	219,1	17	20	150	17	10	35	6,10	12,20
10"		359	273,0	17	26	150	17	15	35	9,20	21,00
12"		419	323,8	17	30	175	17	15	35	13,70	33,00
14"		482,5	355,6	20	34	175	20	20	40	23,00	49,00
16"		536,5	406,4	20	38	175	20	20	40	30,00	68,50
18"		594	457,2	20	44	175	20	20	40	39,50	94,50
20"		651	508,0	20	48	175	20	25	40	50,00	125,50
22"		701,5	558,8	25	52	220	25	25	50	60,50	161,50
24"		771,5	609,6	25	58	220	25	25	50	85,00	211,50

S.1500 Lbs

Dimensions ANSI B 31.3 - B 16.5 - B 16.20

DNP	De	Di	I	S	A	B	C	E	S	Kg.	B
1/2"	60,5	21,6	12	6	110	12	4	25	0,15	0,20	
3/4"	66,5	26,7	12	6	110	12	4	25	0,25	0,30	
1"	76	33,4	12	8	110	12	6	25	0,40	0,45	
1"	1/2"	95	48,3	12	12	110	12	6	25	0,60	0,75
2"		139,5	60,3	12	14	110	12	6	25	1,55	1,90
3"		171,5	88,9	17	22	150	17	10	35	3,35	4,40
4"		206,5	114,3	17	28	160	17	10	35	5,35	7,60
6"		279,5	168,3	17	38	160	17	15	35	12,40	19,00
8"		349	219,1	17	48	170	17	20	35	22,50	36,00
10"		432	273,0	17	58	180	17	25	35	40,50	67,00
12"		517,5	323,8	17	68	180	17	25	35	70,00	114,50
14"		574,5	355,6	20	74	210	20	25	40	95,00	153,00
16"		638	406,4	20	84	210	20	30	40	127,50	212,50
18"		701,5	457,2	20	98	230	20	30	40	174,00	296,50
20"		752,5	508,0	20	106	230	20	30	40	205,00	374,00
22"		-	-	-	-	-	-	-	-	-	-
24"		898,5	609,6	25	128	280	25	35	50	345,00	635,50

S.600 Lbs


Dimensions ANSI B 31.3 - B 16.5 - B 16.20

DNP	De	Di	I	S	A	B	C	E	s	Kg.	B
	1/2"	51	21.3	12	4	100	12	3	25	0.10	0.15
	3/4"	63.5	26.7	12	6	100	12	3	25	0.15	0.20
1"		70	33.4	12	6	100	12	4	25	0.20	0.25
1"	1/2"	92	48.3	12	6	100	12	4	25	0.35	0.45
2"		108	60.3	12	10	100	12	4	25	0.55	0.80
3"		146	88.9	17	14	135	17	6	35	1.40	2.20
4"		190.5	114.3	17	18	150	17	6	35	2.75	4.20
6"		263.5	168.3	17	24	150	17	8	35	6.40	10.60
8"		317.5	219.1	17	30	150	17	10	35	10.20	19.00
10"		397	273.0	17	36	160	17	15	35	19.50	36.00
12"		454	323.8	17	44	160	17	15	35	27.50	55.50
14"		489	355.6	20	48	180	20	20	40	34.00	71.00
16"		562	406.4	20	54	180	20	20	40	51.50	106.50
18"		609.5	457.2	20	62	180	20	20	40	63.00	143.00
20"		679.5	508.0	20	66	180	20	25	40	85.00	190.50
22"		730.5	558.8	25	74	230	25	25	50	104.00	247.50
24"		787.5	609.6	25	82	230	25	25	50	126.50	312.00

S.2500 Lbs

Dimensions ANSI B 31.3 - B 16.5 - B 16.20

[illegible]

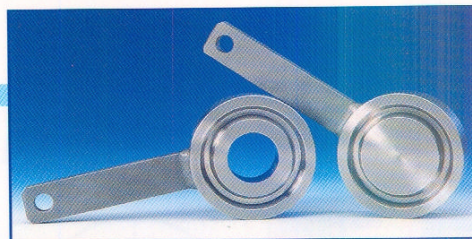

RING SPACERS AND SINGLE BLINDS R.J.

Dimensions ANSI B 31.3 - B 16.5

S.900 Lbs

ensions ANSI B 31.3 - B 16.5

S.300 Lbs

Dimensions ANSI B 31.3 - B 16.5

S.1500 Lbs

Dimensions ANSI B 31.3 - B 16.5

S.600 Lbs

Dimensions ANSI B 31.3 - B 16.5

S.2500 Lbs

ensions ANSI B 31.3 - B 16.5

[illegible]